



**BUSINESS
SOLUTIONS**



**EXCELLENCE IN
SEASONAL EFFICIENCY**



SHRM-e

THE TOSHIBA SHRM-e, FOR A WHOLE RANGE OF INNOVATIONS



e The new Toshiba SHRM-e puts the emphasis on evolution driving excellence in energy savings, expansion in capacity line-up and enhancement in applications. Together, they offer professionals and users faster design, installation and commissioning, outstanding seasonal efficiency at lower operating cost, and superior air comfort with enhanced quality and reliability.

High efficiency and low operating costs

Full of Toshiba innovation, the new SHRM-e achieves an ESEER (European Seasonal Energy Efficiency Ratio) of 8 and above in most capacities. Toshiba's unique combination of twin-rotary compressors and all-inverter-driven control, can adjust the operating speed of the compressors in steps of just 0.1 Hz. This technology when combined with SHRM-e all-new 3-row heat exchanger and Toshiba's "intelligent flow" technology ensures both maximum system performance and even capacity distribution throughout the entire system.

Exceptional quality and reliability

The SHRM-e's innovative dual vane technology reduces variances between the vane and roller, while its unique Diamond-Like Carbon coating technology offers outstanding wear-resistance. Together, these further optimise performance, efficiency, durability and reliability. SHRM-e's sophisticated oil management control ensures optimum oil levels inside each compressor and using Toshiba's dedicated oil balance line control, which can actively transfer oil from one condensing unit to another, ensures total reliability for the whole system.



NEW INNOVATIVE HEAT RECOVERY WITH SIMULTANEOUS HEATING AND COOLING SOLUTION FOR LARGE BUILDINGS

Superior air comfort

The SHRM-e's Automatic Temperature Control system sets minimum and maximum temperatures and maintains air at the desired temperature. Toshiba's new Dual Set Point function instructs the system to stop operation and change mode once the maximum or minimum temperature has been reached.

The system allows continuous heating, even during external defrost, while the new soft cooling mode offers personalised air flow for enhanced cool comfort. The SHRM-e also features individual on/off temperature control via remote control, when multiple indoor units are connected to a single flow selector box.

Flexible design and quick installation

With its new multi-flow selector units, the SHRM-e expands capacity line-up with fewer connections for faster and simpler installation. It also offers extended piping length and operating temperature range for a more flexible design. Improved external static pressure allows flexible unit positioning, whilst Toshiba's unique Wave Tool App enables remote monitoring of CDU operations, an industry first.

SUSTAINABLE DEVELOPMENT

Toshiba is dedicated to designing products and solutions with an ever lower impact on the environment and reduced energy consumption. Our long-standing commitment to sustainable development enables us to anticipate the European climate and energy package requirements for 2030.



CREATING BENEFITS AROUND COMFORT

BENEFITS FOR THE USER

Infinite comfort ...

Achieved by fully-controllable room temperature, a perfect alternative to traditional heating and cooling systems.

Infinite efficiency ...

Low operating costs thanks to reduced installation costs and very high levels of efficiency via optimal load adjustment.

Infinite integration ...

Cooling, heating and fresh air ventilation, all perfectly and conveniently attuned to one another within a single system – and so easy to use!

Infinite reliability ...

Hassle-free operation based upon decades of experience and intensive testing programs for all systems.

Infinite transparency ...

Clearly-defined billing so you can quickly review energy costs and consumption.



EFFICIENT
COOLING



EFFICIENT
HEATING



FRESH AIR
VENTILATION



ENVIRONMENTALLY
FRIENDLY

SHRM
SUPER HEAT RECOVERY MULTI

BENEFITS FOR THE CONSULTANT

Absolute customisation ...

A wide range of products ensures that the customers' requirements are fully addressed.

Absolute validation ...

SHRM-e is EUROVENT certified and adheres to all current European legislations.

Absolute control ...

Fully-integrated controls network, allowing unlimited access to the system controls and its operation.

Absolute flexibility ...

A high degree of system flexibility, aided by a fully-flexible piping specification and an extremely compact modular design.

Simplified design ...

Toshiba Design Airs software makes the selection of a system's components simple.



ENERGY
MONITORING



SIMULTANEOUS
HEATING & COOLING



USER-FRIENDLY
CONTROL SYSTEMS



EASE OF
INSTALLATION &
MAINTENANCE

BENEFITS FOR THE INSTALLER

So simple ...

One supplier – one point of contact for a total solution: cooling, heating, hot water, ventilation and controls.

So versatile ...

Maximised installation flexibility.

So convenient ...

Easy access for all service and maintenance needs.

So professional ...

Intensive training and instruction offered by local Toshiba-trained experts.

So accessible ...


Simplified and swift commissioning assisted by the all new Wave Tool App.

HIGH EFFICIENCY AND LOW OPERATING COSTS

INNOVATIVE COMPRESSOR TECHNOLOGY

Toshiba's infinitely variable inverter-driven control can continually adjust the operating speed of the compressors in real time. This ensures that the capacity output precisely matches end user demand.

The advantages of this control are further optimised by incorporating Toshiba's twin-rotary compressors. These enable the SHRM-e system to achieve maximum performance and class-leading ESEER values.

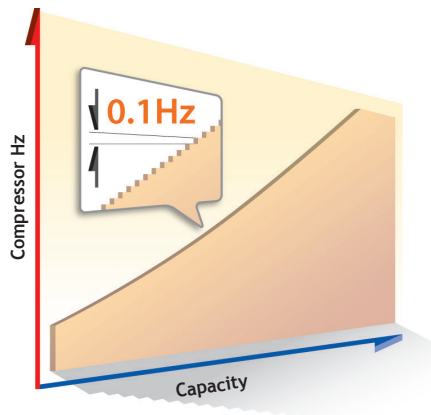

INFINITE VARIABLE CONTROL

This feature has been continually evolved and developed since its inception by Toshiba engineers back in 2004 with the original SMMS system. The control has the ability to adjust the compressor rotational speed in a near

seamless 0.1 Hz steps. This control when matched with Toshiba's newest and latest twin-rotary compressors, allows the system to respond precisely to the capacity needs of the end user, while minimising energy losses.


ADVANCED HEAT EXCHANGER

Toshiba's new 3-row heat exchanger design, with reduced pipe size from 8 mm to 7 mm and increased total number of passes, improves both system performance and efficiency.

While the 3-row heat exchanger design allows the condensing unit to automatically select the most suitable heat exchanger size, precisely matching


the indoor capacity load, its 4-sided design ensures maximum possible flow rate across the entire coil, maximising system efficiency.

Total pipe surface area increased by **13%**
3-row heat exchanger

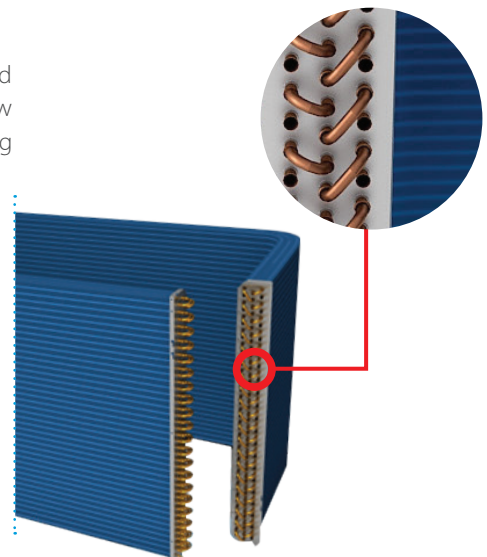


INTELLIGENT FLOW TECHNOLOGY

The unique IFT control continually adjusts the operation of both indoor and outdoor units, based on the feedback from multiple sensors. While the refrigerant flow to each indoor unit is precisely controlled by the outdoor unit, ensuring even capacity distribution throughout the system, the evaporative and condensing temperature is automatically adjusted to maintain optimum indoor room temperature, regardless of the unit's load or its physical distance from the outdoor unit.

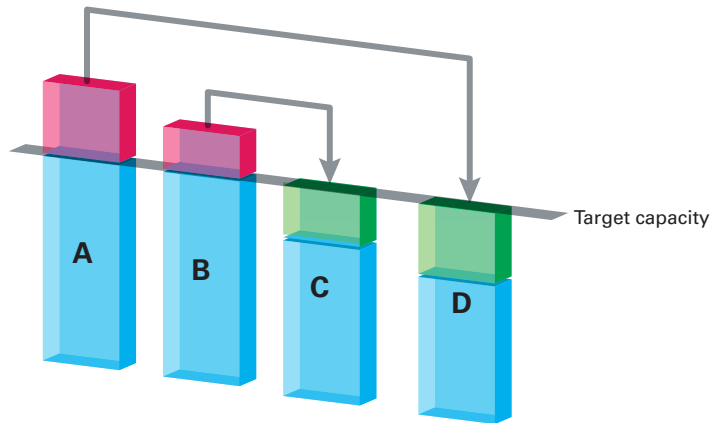

Excess capacity in units A & B can be redistributed to units C & D, ensuring perfect operation throughout the entire system. Toshiba Intelligent Flow Technology (IFT) ensures that any surplus capacity can be redistributed in order to achieve optimum performance and efficiency throughout the entire system.

MAXIMUM PART LOAD AND FULL LOAD EFFICIENCIES

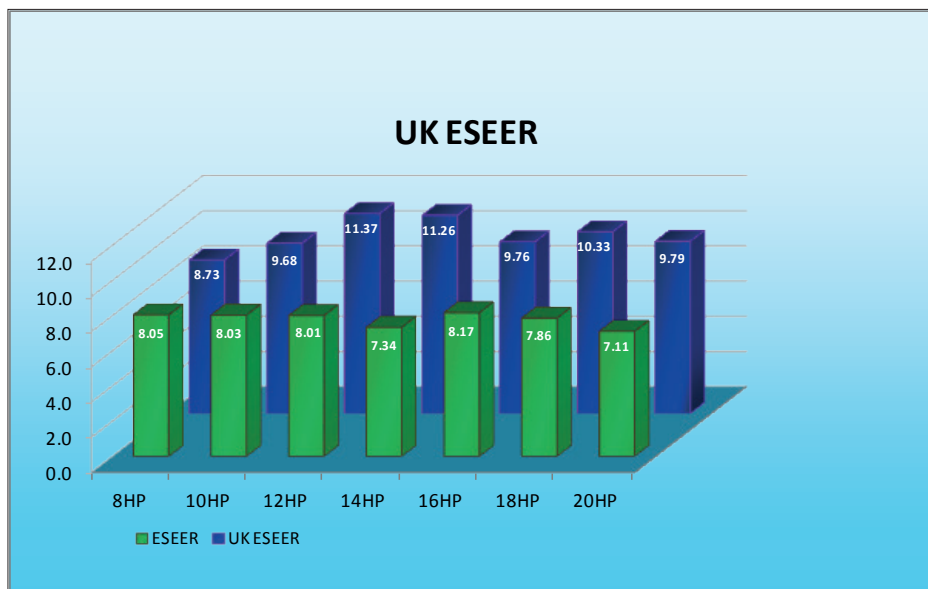

General office accommodation
Cooling part load conditions: 35°C-100%, 30°C-75%, 25°C-50% and 20°C-25%

Utilising the new highly efficient core technologies has resulted in greater energy efficiency and performance.

Thanks to Toshiba's unique twin-rotary compressor, redesigned heat exchanger and "intelligent flow" technology, the new SHRM-e achieves an ESEER of 8.17, the highest seasonal efficiency in the market.


Maximum efficiency is obtained under 50% part load conditions, under which VRF systems operate predominantly. The expert use and evolution of Toshiba's core technologies have allowed the new SHRM-e system to achieve the highest part load COP and EER in the industry.

FLEXIBLE DESIGN AND QUICK INSTALLATION

PIPING DESIGN FLEXIBILITY

Toshiba's piping technology makes them one of the industry's leaders in system flexibility and ease of installation and with the new SHRM-e

system, the level of flexibility has increased further, giving more options to the contractor and installer alike.

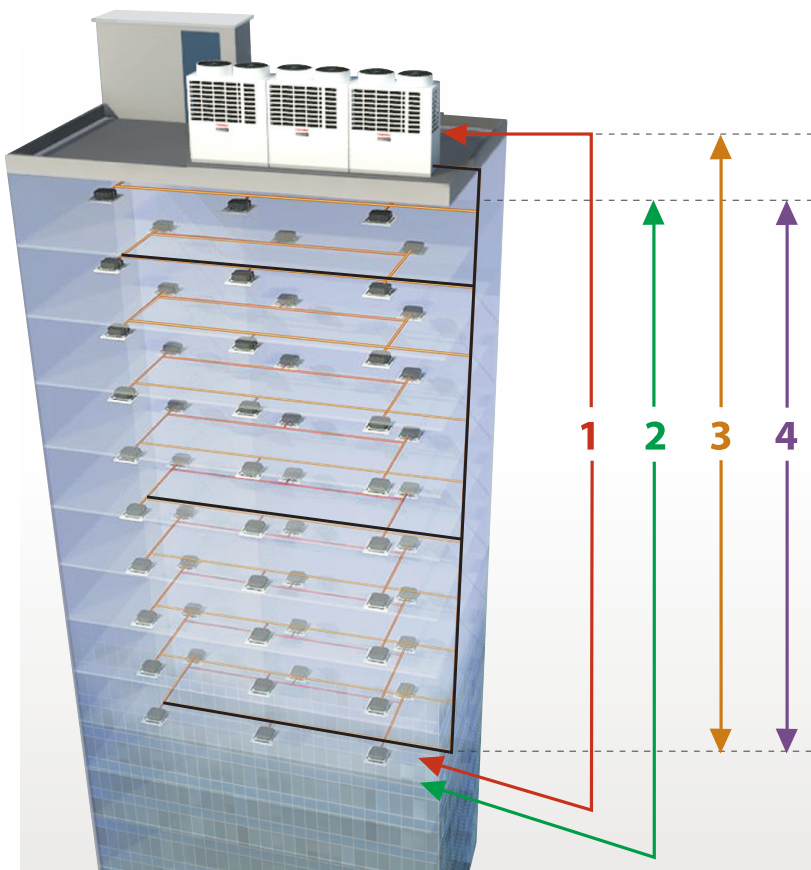

* Above 34 HP combination

** It is 70 m for normal time, and has some specific conditions for 90 m, 50 m if piping length between Indoor units is more than 3 m

*** It is allowed only if you use the multi-port FS unit

1 Total piping length

Applied with Toshiba's unique and greatly improved technology, SHRM-e can reach up to 1,000 metres maximum piping length.

Total piping length

1,000 m*




2 Furthest equivalent length

The maximum equivalent distance between the outdoor unit and the furthest indoor unit tops at 200 metres, a best-in-class for the industry.

Furthest equivalent length

200 m



3 Height between outdoor unit and indoor unit


Another industry best-in-class feature is the maximum vertical distance between the outdoor and indoor units, which can extend up to 90 metres. SHRM-e's enhanced piping capabilities results in more benefits for system design and installation flexibility, as well as lower installation costs.



4 Piping design flexibility "FS unit-FSU"

Furthest pipe from FS unit-Indoor unit

50 m***




As the SHRM-e multi-flow selector and indoor unit can be as far as 50 metres apart, the refrigerant piping can be lengthened, offering more flexibility in design to make every space both more comfortable and attractive.

SINGLE- AND MULTI-PORT FLOW SELECTOR FOR INCREASED FLEXIBILITY


The latest generation single-port flow selector unit increases the design flexibility of the system, offering longer distances of up to 50 m between flow selector box and indoor units, for example where noise level is of paramount importance, and connection of up to 8 indoor units onto one individual flow selector box.

Premium single-port FS unit

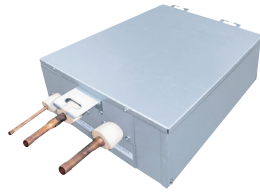

FS box to indoor unit up to 50 m


Standard single-port FS unit



Max. 15 m

The use of multi-flow selector units increases the design flexibility of the system, offering the same overall capacity and allows much faster and simpler installation, while layout design is more flexible, thanks to simplified branch and branch connections. Reducing the length of the branches also allows increased capacity. This configuration is available with either group or individual remote control.

Multi-port FS unit

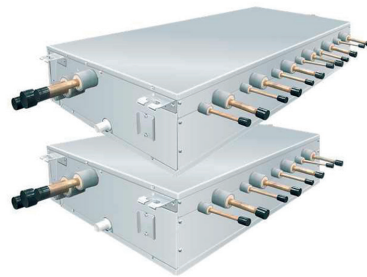


x 6 branch up to 60 x indoor units

x 4 branch up to 40 x indoor units

NEAR FIELD TECHNOLOGY AND WAVE TOOL, ALL YOUR DATA WITHIN REACH



With Near Field Communication (NFC), the SHRM-e is the first in the industry to allow remote monitoring of CDU operations. Using NFC technology, Read and Write data is exchanged wirelessly between the unit and a smartphone (Android, OS, 5.0) for remote commissioning and operations data checking.



Product data
System data
Fault history
Test operation results
(Android, Apple)




Less time needed for system configuration and maintenance operations

SOFTWARE DESIGN AIRS MAKES IT EASIER



The new "Airs" software has been fully redesigned, with a user-friendly interface allowing novice and expert users alike to create simple, yet detailed VRF system schematics. It is highly versatile, allowing the level of detail to be tailored to suit customer requirements.

The software also allows the user to specify pricing strategy and create additional interim reports, including any diagrams and schematics required. Final detailed reports can then be produced and sent to customers in PDF format or in more complex files, such as AutoCAD DXF, allowing simple integration into their existing software packages.

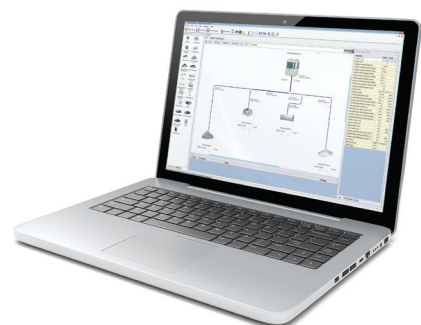


SUPERIOR AIR COMFORT

COOL COMFORT WITH SOFT COOLING MODE


The development of the soft cooling mode provides a new level for cool comfort. You will have the freedom

to personalise the air flow intensity, angle and direction directly from the remote control and enjoy the indoor

environment at the right temperature without being directly exposed to the cold draught.

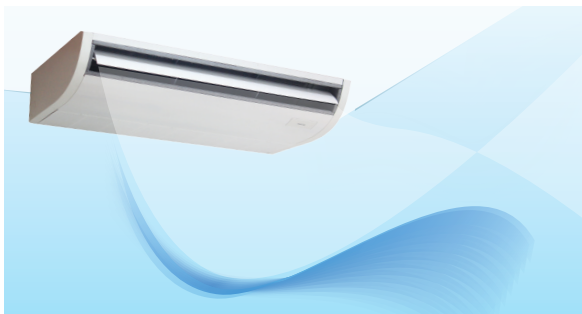

Standard operating mode

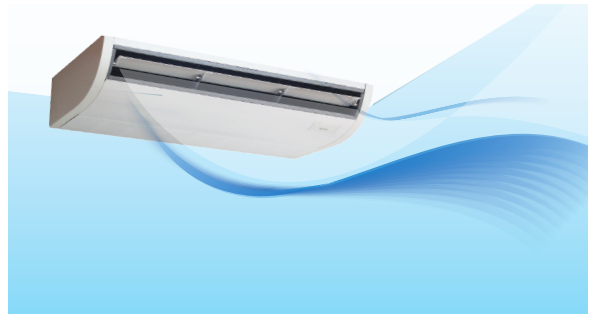

Soft cooling mode


OPTIMISED HEATING OPERATIONS

The SHRM-e allows continuous heating, even during external defrost operations, thanks to the new hot gas bypass control. Indoor units will now operate continually, with only a minimal reduction in capacity output. This results in an uninterrupted flow of warm air, ensuring maximum comfort to the end user.



DUAL SET POINT FOR MORE PRECISION

The Dual Set Point increases the system's energy efficiency and reduces overall running costs, with longer periods of time in thermal off mode. Heating and cooling temperatures at which the indoor unit will begin to operate can now be individually selected giving maximum flexibility to the user.

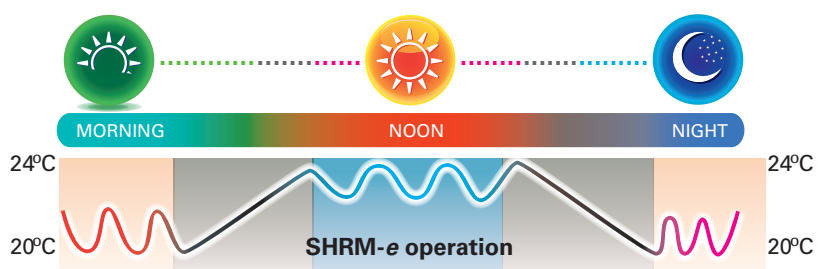

SMART AUTOMATIC TEMPERATURE CONTROL SYSTEM

The SHRM-e's Automatic Temperature Control (ATC) system has been designed to enhance user comfort and reduce energy consumption. Each user can easily set minimum and maximum temperatures with the ATC,

which automatically maintains the air at the desired temperature. Once the maximum temperature has been reached, the intelligent Dual Set Point function will tell the system to shut down and change mode to adjust the

temperature to the minimum required, or vice versa. This enhances efficiency and reduces running costs, by extending the thermal off periods, when the unit stops between changes in heating and cooling mode.




INNOVATIVE INDIVIDUAL ON/OFF AND TEMPERATURE CONTROL

The innovative multi-flow selector allows smart temperature control in each space via individual remote controls. This meets users' different


temperature requirements for maximum comfort, and if rooms are empty, the unit can be switched off.

This solution helps reduce energy waste, improve efficiency and save on overall costs.

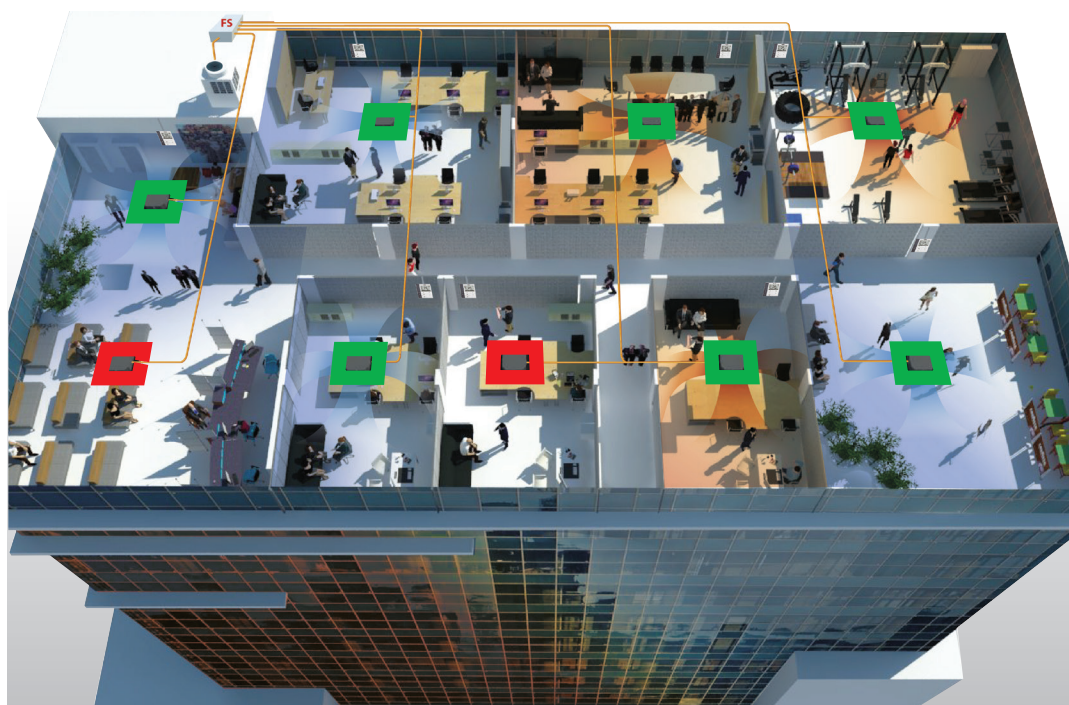

EXCEPTIONAL QUALITY AND RELIABILITY


MORE DURABLE WITH LEADING TWIN-ROTARY COMPRESSOR TECHNOLOGY

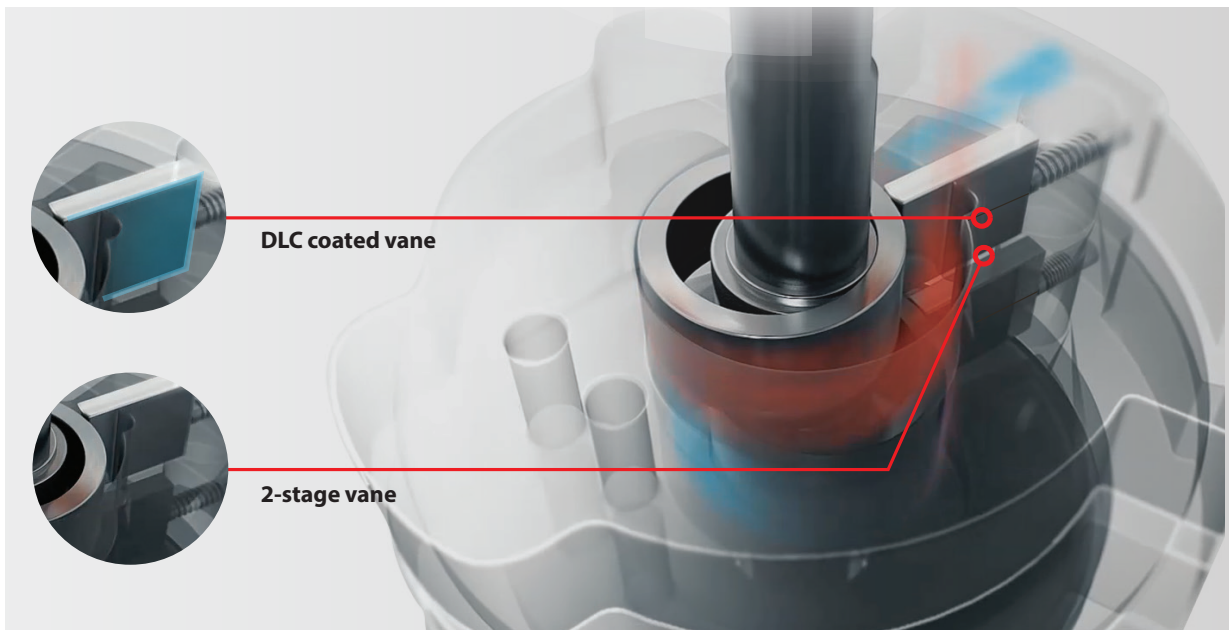

The advanced technology used within SHRM-e units results in a robust and durable system. The innovations made with Toshiba twin-rotary compressor have resulted in an

even stronger and more reliable system, extending the operational life and, thus, reducing the overall maintenance costs.

Operating temperature range

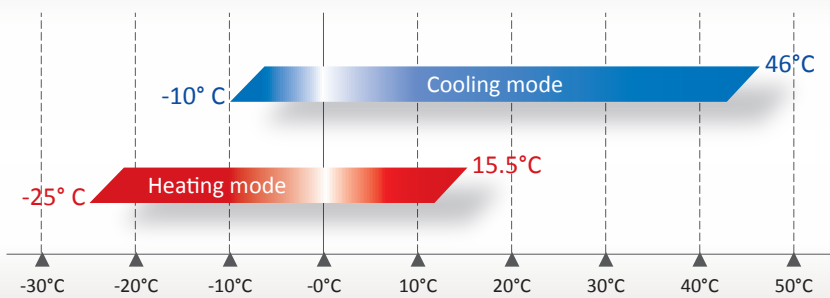

Extensive operating temperature range of up to 46 °C in cooling mode and down to -25 °C in heating mode thanks to new compressor design and system controls.


DEDICATED OIL MANAGEMENT

The Toshiba SHRM-e oil management control constantly monitors the real-time oil level inside each of the compressors. Based on these readings, the system can initiate various system oil retrieval controls and

via the dedicated oil balance line between CDUs, the system can maintain the optimum amount of oil inside each compressor at all times.

WIDE-RANGE COMPRESSOR


Using new cutting-edge technology, Toshiba's new twin-rotary DC driven compressor can operate in a much wider range of rotational speed, giving increased performance, while maximising energy efficiencies.

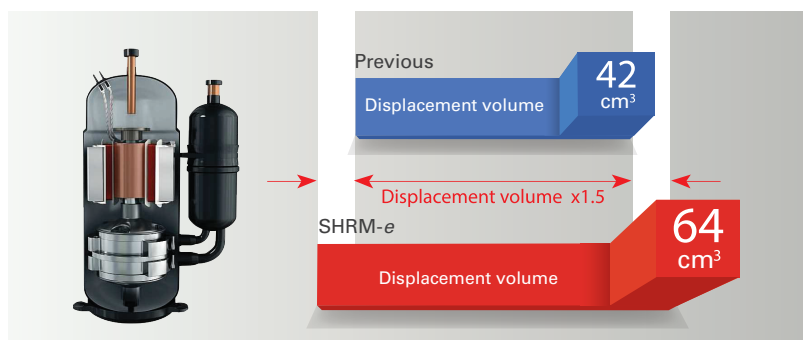

DUAL VANE TECHNOLOGY FOR ENHANCED PERFORMANCE

The all-new dual vane technology reduces any variances in the contact area between the vane and roller, even when the compressor is operating at very high speeds.



This results in minimal compression losses inside the compressor, further optimising its performance, efficiency and reliability.

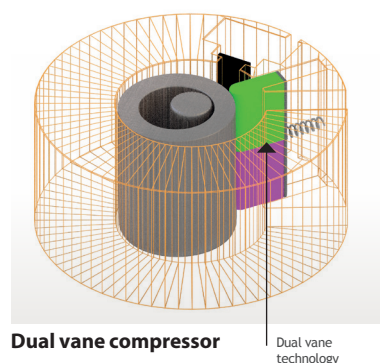

THE DIAMOND-LIKE CARBON COATING




The new Toshiba Diamond-Like Carbon coating technology is unique to Toshiba VRF compressors. It covers the wear surfaces on compression vanes for outstanding hardness and wear-resistance, enhancing both the compressor's performance and durability and confirming Toshiba's reputation of providing exceptional reliability.

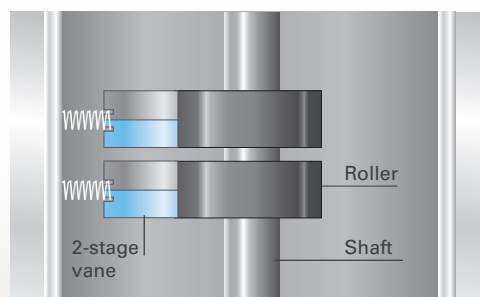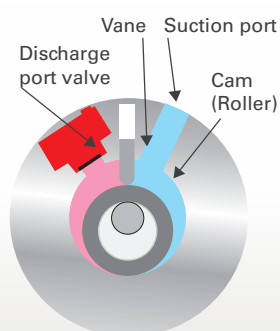

MAXIMUM RELIABILITY WITH BACK-UP OPERATION

For maximum reliability, all-inverter control can be adjusted to compensate for a failed compressor or header unit. In the unlikely event of a compressor failure, back-up operation is available in both a single system or as a module. This provides reassurance to the end user that the system will continue to operate whatever the circumstance.

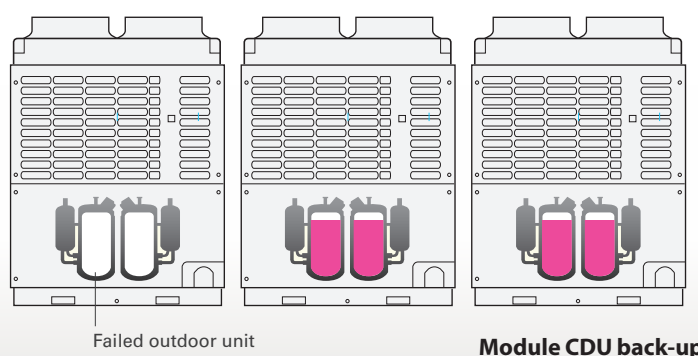

INDOOR UNITS AND ACCESSORIES

MULTIPLE DESIGN ... COMPLETE SOLUTION

| Model | HP kW | 0.6 | 0.8 | 1.0 | 1.3 | 1.7 | 2.0 | 2.5 | 3.0 | 3.2 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 | |
|--|----------|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|--|
| | | 1.7 | 2.2 | 2.8 | 3.6 | 4.5 | 5.6 | 7.1 | 8.0 | 9.0 | 11.2 | 14.0 | 16.0 | 22.4 | 28.0 | |
| CASSETTE TYPES Compact 4-way cassette type (600 x 600) MMU-AP(...)MH1-E | | [Blue bar from 1.7 to 2.8 kW] | | | | | | | | | | | | | | |
| 4-way cassette type MMU-AP(...)HP1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| 2-way cassette type MMU-AP(...)WH1 | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| 1-way cassette type MMU-AP(...)YH/SH1-E | | [Blue bar from 2.8 to 5.6 kW] | | | | | | | | | | | | | | |
| DUCT TYPES Slim duct type MMD-AP(...)SPH1-E | | [Blue bar from 1.7 to 8.0 kW] | | | | | | | | | | | | | | |
| Concealed duct type MMD-AP(...)BH(P)1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| Concealed duct high static pressure type MMD-AP(...)6HP1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| Fresh air intake indoor unit type MMD-AP(...)HFE | | [Blue bar from 11.2 to 28.0 kW] | | | | | | | | | | | | | | |
| Concealed duct high static pressure type MMD-AP(...)HP-E | | [Blue bar from 11.2 to 28.0 kW] | | | | | | | | | | | | | | |
| CEILING TYPES MMC-AP(...)HP1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| HIGH WALL TYPES Series 4 MMK-AP(...)4MH(P)1-E | | [Blue bar from 1.7 to 2.8 kW] | | | | | | | | | | | | | | |
| Series 3 MMK-AP(...)3H1 | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| FLOOR STANDING TYPES Floor standing concealed type MML-AP(...)BH1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| Floor standing type MMF-AP(...)H1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |
| Console type MML-AP(...)NH1-E | | [Blue bar from 2.8 to 16.0 kW] | | | | | | | | | | | | | | |

| Model | m³/h | Air flow rate/air volume | | | | | | | | | | | | | | |
|--|------|-----------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|--|
| | | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1650 | 1800 | 1950 | 2100 | |
| Fresh air intake indoor unit type MMD-AP(...)HFE | | [Blue bar from 1050 to 2100 m³/h] | | | | | | | | | | | | | | |
| Air-to-air heat exchanger with DX coil MMD-VN**2HEX1E | | [Blue bar from 450 to 900 m³/h] | | | | | | | | | | | | | | |
| Air-to-air heat exchanger with DX coil humid filter MMD-VNK**2HEX1E | | [Blue bar from 450 to 900 m³/h] | | | | | | | | | | | | | | |
| Air-to-air heat exchanger VN-M**0H1E | | [Blue bar from 150 to 2100 m³/h] | | | | | | | | | | | | | | |

CONTROLS

INCREASING COMFORT LEVELS BY GETTING THE CONTROLS RIGHT

Comfort, economic efficiency and safety can be further maximised with modern control mechanisms. Whether wired or remotely controlled

units, web-based control devices or elegant touch screen systems, the important thing is to achieve the right temperature at the right time and in

the right place! It's all about balance – and we've got it just right.

WIRED REMOTE CONTROLS

Wired Remote Controller
RBC-AMS54E-ES



Standard Remote Controller
RBC-AMT32E



Remote Controller with Weekly Timer
RBC-AMS41E



Simple Wired Remote Controller
RBC-AS41E



CENTRAL CONTROLLERS

Central Remote Controller
BMS-CM1280TLE



Schedule Timer
TCB-EXS21TLE



ON-OFF Controller
TCB-CC163TLE2



Smart Touch-Screen Controller
RBC-TBPTS



BMS CONTROLLERS

Black Pear Controller
RBC-BP*1 BACnet, Modbus, Trend



Smart BMS Manager
BMS-SM1280ETLE



WIRELESS REMOTE CONTROLS

Infrared Remote Control




Receiver kit for the installation on the wall or ceiling.
TCB-AX32E2



Receiver kit to be installed directly in the frame of the indoor unit.
RBC-AX33CE



Receiver kit to be installed directly in the frame of the indoor unit.
RBC-AX32U(W)-E



Receiver kit to be installed directly in the frame of the indoor unit.
RBC-AX32UW(W)-E




CONNECTABLE OPEN NETWORK

BACnet®
BMS-IFBN640TLE
BMS-STBN10E: Software,
BMS-LSV9E: Server



LonWORKS®
TCB-IFLN642TLE









Modbus®
TCB-IFMB641TLE















KNX®









SHRM-e - HEAT RECOVERY OUTDOOR MODULES

| | | | | | | |
|--------------------------|---|---|---|--|---|---|
| |  |  |  |  |  |  |
| Model (MMY-) | MAP0806FT8P-UK | MAP1006FT8P-UK | MAP1206FT8P-UK | MAP1406FT8P-UK | MAP1606FT8P-UK | MAP1806FT8P-UK |
| HP | 8 | 10 | 12 | 14 | 16 | 18 |
| Capacity kW (C/H) | 22.4 25.0 | 28.0 31.5 | 33.5 37.5 | 40.0 45.0 | 45.0 50.0 | 50.4 56.5 |

| | | | | | | |
|--------------------------|---|---|---|--|---|---|
| |  |  |  |  |  |  |
| Model (MMY-) | MAP2006FT8P-UK | AP2216FT8P-UK | AP2416FT8P-UK | AP2616FT8P-UK | AP2816FT8P-UK | AP3016FT8P-UK |
| HP | 20 | 22 = 12+10 | 24 = 14+10 | 26 = 14+12 | 28 = 14+14 | 30 = 16+14 |
| Capacity kW (C/H) | 56.0 58.0 | 61.5 69.0 | 68.0 76.5 | 73.5 82.5 | 80.0 90.0 | 85.0 95.0 |

| | | | | | | |
|--------------------------|---|---|---|--|---|---|
| |  |  |  |  |  |  |
| Model (MMY-) | AP3216FT8P-UK | AP3416FT8P-UK | AP3616FT8P-UK | AP3816FT8P-UK | AP4016FT8P-UK | AP4216FT8P-UK |
| HP | 32 = 18+14 | 34 = 18+16 | 36 = 18+18 | 38 = 20+18 | 40 = 20+20 | 42 = 14+14+14 |
| Capacity kW (C/H) | 90.4 101.5 | 95.4 106.5 | 100.8 113.0 | 106.4 114.5 | 112.0 116.0 | 120.0 135.0 |

SHRM-e - HIGH EFFICIENCY HEAT RECOVERY OUTDOOR MODULES

| | | | | | | |
|--------------------------|---|---|---|--|---|---|
| |  |  |  |  |  |  |
| Model (MMY-) | AP1626FT8P-UK | AP1826FT8P-UK | AP2026FT8P-UK | AP2426FT8P-UK | AP2626FT8P-UK | AP2826FT8P-UK |
| HP | 16 = 08+08 | 18 = 08+10 | 20 = 10+10 | 24 = 08+08+08 | 26 = 08+08+10 | 28 = 08+10+10 |
| Capacity kW (C/H) | 44.8 50.0 | 50.4 56.5 | 56.0 63.0 | 67.2 75.0 | 72.8 81.5 | 78.4 88.0 |

Toshiba Air Conditioning
 United Technologies House,
 Guildford Road, Leatherhead,
 Surrey KT22 9UT

Tel: 01372 220240
 Fax: 01372 220241
 marketing.uk@toshiba-ac.com



Toshiba Air Conditioning participates in the ECP program for Variable Refrigerant Flow (VRF). Check ongoing validity of certificate on www.eurovent-certification.com



The materials and information referenced in this brochure are for informational purposes only and not for the purpose of providing legal or other professional advice. SHRM-e - July 2016. ©Toshiba 2016. All rights reserved. Toshiba reserves the right to change certain information and specifications contained in this document at any time and without prior notice. actitudes.com © photos: Gettyimages/Shutterstock. - Ref.: SHRM-e Sales Brochure - 07/2016